


IEC 60945 FULLY TESTED MARINE KEYBOARD  
LED backlit keyboard with 50mm trackball



DURALIGHT



This „Duralight“ 106 key backlit keyboard is approved for use with Solas Marine applications (f.i ECDIS). The keyboard has a multi-functional layout with separate numerical- and control keypads and integrates a large 50mm industrial trackball.

MAIN FEATURES

- Certificate of Conformity fully compliant with IEC60945
- User-friendly layout with separate numerical-, control- and function keypads
- High brightness LED's with fibre optics
- Illumination of the key legends and contour, the trackball contour and even customer logo's or trademarks.
- Low power LED's warrant for a long life
- No external power supply necessary, keyboard port power sufficient
- Dimmable backlighting at 8 levels by two dedicated keys
- Intelligent luminosity setting of "numlock" and capslock" LED's
- White backlighting as standard, other colours on request.

Panel mount version :

- Aluminium carrier and silicone sponge panel sealing
- Front panel mounting by means of M3 threaded studs.
- Added silicon sponge seal for perfect sealing into the user's panel
- The rear side components are protected by a covering metal plate
- Version with edge protection : In case the keyboard can not be sunk mounted we recommend the bezel for edge protection
- Dimensions / weight :  
version with bezel 447,5 x 167,5 x 45 mm / 1,3 kg  
version without bezel : 432 x 152 x 45 mm / 1,2 kg

Enclosed version :

- The keyboard is mounted in a robust, all steel enclosure
- Industrial epoxy coating (mid-grey).
- Dimensions / weight : 475 x 215 x 57 mm / 3,5 kg

GENERAL TECHNICAL SPECIFICATIONS

Sealing : IP65 sealed  
 Keys : 106 short travel switches, tactile feel switches with 0,3 mm travel and 2,55 N operating force  
 Pointing Device : 50 mm trackball, black epoxy resin ball  
 Output : USB output for keyboard and trackball via shielded cable of 1,6 meter.  
 Power requirements : Directly from USB port  
 Operating temp. : -15°C to +60°C  
 Front layer : Black polyester front layer with embossed keys, scratch and chemical resistant  
 Compass safe distance : 0.2 m (panel mount) / 1.4 m (enclosed)

[IEC60945\\_certificate\\_KSML106.pdf](#)

CUSTOMIZATION

Possible customization includes adapted backlighting controls, addition of company logo or specific function keys, different layouts, different colour, all this without having to reapply for certification!



ORDER INFO

LAYOUT	PANEL MOUNT WITH BEZEL	PANEL MOUNT	ENCLOSED
US Qwerty	KSML106 B0001-W-MC1	KSML106 F0001-W-MC1	KSML106 S0001-W-MC1
FR Azerty	KSML106 B0033-W-MC1	KSML106 F0033-W-MC1	KSML106 S0033-W-MC1
DE Qwertz	KSML106 B0049-W-MC1	KSML106 F0049-W-MC1	KSML106 S0049-W-MC1



US Qwerty layout, USB output, white backlighting



DIMENSIONAL DRAWING

panel mount version with edge protection bezel




COLOURS

Keyboard & Key Background :  
PANTONE Black 2 C 2X  
Key edges & key legends :  
white Translucent



DIMENSIONAL DRAWING

panel mount version without bezel

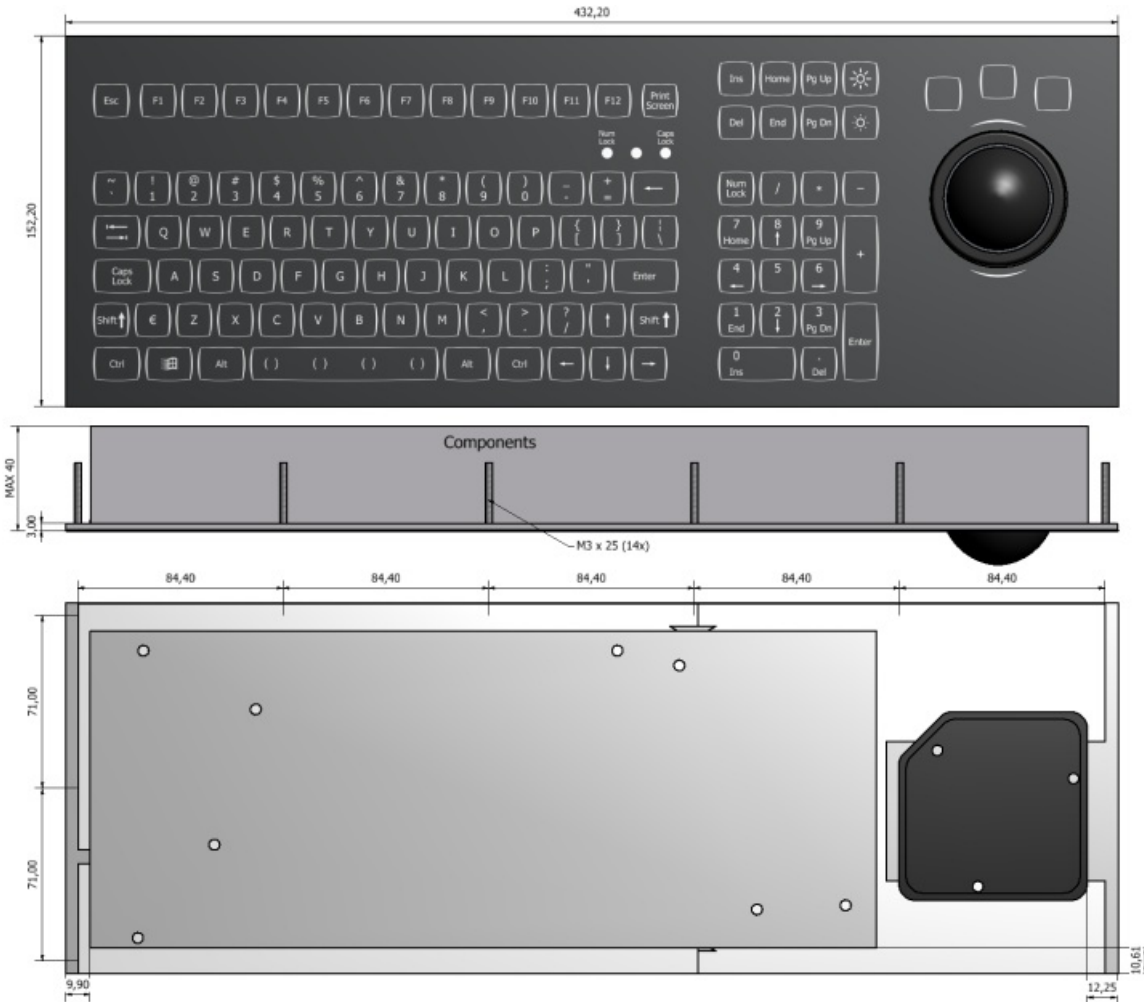

enclosed version



COLOURS

Keyboard & Key Background :  
PANTONE Black 2 C 2X  
Key edges & key legends :  
white Translucent