


# LYYN EAGLE BOARD INTEGRATION KIT

## The Llyn inside™ solution for digital video

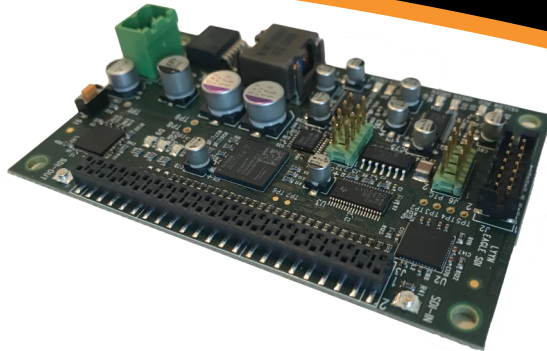

### LYYN Inside

The Llyn Eagle Integration kit is the ideal solution for advanced users, product manufacturers and system integrators that want to have lynnification fully integrated into their own HD-video solution.

### Simple integration

The kit contains all the necessary parts for simple plug-and-play integration. You connect your HD-SDI video to the board's micro coax connectors. The board can be controlled by the included control panel or by software over a standard RS232 serial interface.

### Standard control panel for manual control



A thin membrane keypad panel is included in the kit. The panels adhesive backing can be mounted and sealed to a flat surface. The panel is connected to the Llyn Eagle Board with a flat cable (included) and an intermediate PCB.

### Software control

The Eagle Board can be controlled remotely through a standard RS232 serial interface with simple text commands. You can write scripts and/or software on your own control platform for an integrated solution.

## BASIC JAPAN

Basic Japan Co., Ltd. Sugunami Tokyo, Japan  
Phone: +81-3-5335-7651

E-mail: [mail@basicjp.com](mailto:mail@basicjp.com) / URL: [www.basicjp.com](http://www.basicjp.com)

US Patent No. 8,023,730 and equivalent patents and patent applications in other countries.

### Video standards

Standard	Name	Bit rates	Resolution & frame-rate
SMPTE 292	HD-SDI	1.485 Gbit/s, and 1.485/1.001 Gbit/s	720p, 1080i60
SMPTE 424	3G-SDI	2.970 Gbit/s, and 2.970/1.001 Gbit/s	1080p60

### Physical connectors

Video: Hirose H.FL contacts. Use 75  $\Omega$  cabling  
Communication: 2.54 mm through-hole header contacts.  
Samtec HLE-123-02-F-DV-BE-A

### Included in the package

2 H.FL75 200 mm coaxial cables  
2 H.FL to BNC adapters  
Power connector, male & female  
Keypad and associated cabling

### Power

5 V DC, 1.0 A.

### Operating conditions

Temperature: 0 — 50 °C (32 — 122 °F)  
Humidity: 0 — 80% RH (non-condensing)

### Dimensions and weight

Board: 55 mm x 90 mm x 30 mm  
Weight: 150 g  
Mounting holes: 4 x M4  
Control panel: 80 mm x 50 mm x 1 mm

### Video latency

1 microsecond

More information is available at [www.llyn.com](http://www.llyn.com)

 **LYYN**®  
we give you a clearer vision