



CMG-838EPTAT



Introduction

Overview

The CMG-838EPTAT (extended temperature) and CMG-838PTAT (standard temperature) are industrial Ethernet managed Power over Ethernet switches that comes with 8 x 10/100Base-T(X) ports and 3 Gigabit/Fast Ethernet SFP ports that provide stable and reliable Ethernet transmission. The switch comes with eight PoE/PoE+ injectors classified as power source equipment (PSE) to power IEEE 802.3af/at compliant powered devices (PD), eliminating the need for additional wiring and provide an economical solution for your industrial Ethernet network.

Ethernet Direct offers the latest technologies in Power over Ethernet supporting IEEE 802.3af and IEEE 802.3at as well as advanced PoE management functions such as weekly PoE power scheduling, device auto-checking and auto-reset. This powerful switch uses Made in the USA CPU platform for maximum hardware product reliability. In addition, the enhanced software features support a variety of Ethernet functions including STP/RSTP/MSTP/ ITU-T G.8032 ERPS and multiple Direct-Ring for redundant cabling, layer 2 Ethernet IGMP, VLAN, Quality of Service, ACL, Security, IPv6, bandwidth control, port mirroring, cable diagnostic and Green Ethernet.

The CMG-838EPTAT and CMG-838PTAT are especially designed for harsh environments with rugged DIN-Rail metal enclosures to withstand applications where environmental conditions exceed normal product specifications. Ethernet Direct focuses on mission critical applications and these switches are suitable for industrial networking, security & surveillance, intelligent transportation systems (ITS), military & defense, building automation, factory automation, utility market applications and more. This switch supports standard operating temperature model (-10 to 60°C) and extended operating temperature range models (-40 to 75°C).

Features

High Performance Network Switching Technology

- Complies with IEEE standards
- Provides 8 x 10/100Base-T(X) with RJ-45 connector with supporting of Green Ethernet IEEE802.3az EEE (Energy Efficient Ethernet)
- Provides 3 x 100/1000Base SFP slots with supporting of DDM1
- 8 x PoE/PoE+ ports and each port support power output up to 30 watts per port
- Max. PoE power budget at 180 watts
- Supports advanced PoE management functions such as auto checking and auto reset while PD fail, PoE ports on/off scheduling and PoE configuration for power planning
- Supports various network redundant solutions, including Direct-Ring, Direct-Chain, Join-Ring, STP, RSTP, MSTP and ITU-T G.8032
- Proprietary ultra high speed redundant technology with < 10ms recovery time @ 250 devices
- Supports IEEE1588 PTP V2 for precise time synchronization, to operate in Ordinary-Boundary, Peer to Peer Transparent Clock, End to End Transparent Clock, Master, Slave mode by each port
- Supports various network security solutions, Port and MAC based IEEE802.1X, RADIUS, ACL, TACACS+, HTTP/HTTPS, SSL/SSH v2
- Supports DHCP Server/Client/Relay/Snooping option 82/Relay option 82
- Network traffic priority, QoS, Traffic classification QoS, CoS, bandwidth control for Ingress/Egress, broadcast storm control, DiffServ

- Supports IEEE802.1Q VLAN, MAC-based VLAN, IP Subnet-based VLAN, Protocol-based VLAN, VLAN translation, GVRP/MVVRP
- Supports IGMP/MLD snooping V1/V2/V3, IGMP Filtering/Throttling, IGMP query, IGMP proxy reporting, MLD snooping
- Supports dynamic IEEE 802.3ad LACP Link Aggregation, Static Link Aggregation
- Supports RMON, MIB II, Port mirroring, Syslog, IEEE802.1ab LLDP for network monitoring
- Supports IPv6 Telnet server, ICMPv6
- Supports CLI, Web based management, SNMP v1/v2c/v3, Telnet server for management
- Supports firmware upgrade via TFTP & HTTP with redundant firmware option

Reliable Power Design

- Supports 24 to 48VDC redundant power input
- Power reverse polarity protection and overload current protection

Robust Industrial Design

- EN 61000-6-2 and EN 61000-6-4 certified to use in heavy industrial environment
- NEMA TS-2 certified for Traffic Control
- EN 50121-4 certified for Railway Applications (Track Side)
- Robust industrial design case complies with IP30 housing standard
- Supports operating temperature -10 to 60°C & extended temperature -40 to 75°C
- DIN-Rail or optional wall mounting installation

Specifications

Hardware Specifications

Interface

Total Ports: 11 ports
RJ-45 Ports: 8 x 10/100Base-T(X) auto-negotiation speed, Full/Half duplex, auto MDI/MDI-X
Console Port: RS-232 (RJ-45 interface)
Fiber Ports: 3 x 100/1000Base SFP slots
LEDs: System: Power 1 (Green), Power 2 (Green), Fault (Amber), CPU Act (Green), Ring Master (Yellow) / Fiber Ports: Link/Active (Green) / RJ-45 Ports: 10/100 Link/Active (Green)
PoE: PoE Output Power on (Green), PoE Fault: Flash (Green, 1times /sec)
Alarm Contact: 1A@24VDC
CPU Watchdog: Supported

Power Requirements

Power Input: 24 to 48VDC, redundant dual inputs
Power Consumption:
 24VDC: 198.3 (Full load with PoE), 7.3W (Without PoE), Booster Efficiency 94%
 48VDC: 193.2 (Full load with PoE), 7.9W (Without PoE), Booster Efficiency 97%
Power Protection: Reverse polarity protection, overload current protection

PoE

PoE Power Budget: Max. 180W for total PD consumption
 Built-in high efficiency power booster to boots up and regulate the output power at 55VDC for PoE/PoE+ requirement, and to stabilize the PDs with guarantee deliver of PoE power up to 100 meters
 PoE Standard: IEEE802.3at / 30W per port; IEEE802.3af / 15.4W per port
 PoE Pin Assignment: Endspan, Alternative A
 Positive (V+): RJ-45 pin 1, 2 / Negative (V-): RJ-45 pin 3, 6 / Data (1, 2, 3, 6)

Physical

Dimensions: IP30 standard, 72mm (W) x 152mm (H) x 106mm (D)
Installation: DIN-Rail or optional wall mounting

Environmental

Operating Temperature: Regular: -10 to 60°C , Extended: -40 to 75°C
Storage Temperature: -40 to 85°C
Operating Humidity: 5% to 95% RH (Non-condensing)

Technical Standard:

IEEE 802.3 10Base-T Ethernet
 IEEE 802.3u 100Base-TX/100Base-FX
 IEEE 802.3z Gigabit Fiber
 IEEE 802.3x Flow Control
 IEEE 802.3ad Port trunk with LACP
 IEEE 802.3ac VLAN Tagging extension (Max. frame size extended to 1522 Bytes)
 IEEE 802.3az EEE (Energy Efficient Ethernet)
 IEEE 802.3af PoE
 IEEE 802.3at PoE+
 IEEE 802.1D Spanning Tree
 IEEE 802.1w Rapid Spanning Tree
 IEEE 802.s Multiple Spanning Tree
 IEEE 802.1p Class of Service
 IEEE 802.1Q VLAN Tagging
 IEEE 802.1X User Authentication (Radius)

Industrial 11-ports Gigabit Managed PoE/PoE+ Ethernet Switch with Fiber Ports

IEEE 802.1AB LLDP
ITU-T G.8032 / Y.1344 ERPS (Ethernet Ring Protection Switching)

Regulatory Approvals

EMC: CE, EN 61000-6-2, EN 61000-6-4
EMI: FCC Part 15 Subpart B Class A, CE EN55022 Class A
EMS: EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8,
Safety: UL 60950-1
Traffic Control: NEMA TS-2 (Certified)

Software Specifications

Redundancy:

Direct-Ring, Direct-Chain, Join-Ring < 10ms recovery time,
(Each switch can configure up to 5 rings regardless of Direct-Ring, Direct-Chain, Join-Ring,
and each ring can contents 250 units of switches), supports loop protection
STP/RSTP/MSTP
ITU-T G.8032 / Y.1344 ERPS with < 50ms recovery time
(Single Ring, Sub-Ring, Multiple ring topology networks)
Link Aggregation: Static supports up to 5 trunk groups
Dynamic (IEEE 802.3ad LACP) supports up to 5 trunk groups

VLAN:

VID 1 to 4094
VLAN group up to 4094 groups
IEEE 802.1ad Q-in-Q
MAC-based VLAN (256 entries)
IP Subnet-based VLAN (128 entries)
Protocol-based VLAN (Ethernet, SNAP, LLC), (128 entries)
VLAN Translation (256 entries)
GVRP (GARP VLAN Registration Protocol)
MVR (Multicast VLAN Registration)

QoS:

Port based and IEEE 802.1p based CoS
QoS determined by port, per port 8 active priorities queues
IP Precedence based Co, IP DSCP based CoS
DiffServ (RFC 2474) Remarking

Bandwidth Control:

Ingress/Egress

Storm Control:

Unicast, Broadcast, Multicast

IGMP/MLD Snooping:

IGMP Snooping v1/v2/v3, MLD Snooping v1/v2
Port Filtering Profile
Throttling, Fast Leave
Maximum Multicast Group: Up to 1022 entries
Query / Static Router Port

Security:

IEEE 802.1X (Port-based, MAC-based), RADIUS, TACACS+ 3.0
Supports ACL, no. of rules up to 256 entries
HTTP/HTTPS, SSL, SSH v2
Local Authentication
Remote Access Security: RADIUS, TACACS+
Management interface access filtering via Web, Telnet/SSH, CLI console

Protocol Technology: CSMA/CD
Switching Architecture: Store and Forward

Railway Application (Track Side): EN 50121-4 (Certified)

Shock: IEC 60068-2-27

Vibration: IEC 60068-2-6

Free Fall: IEC 60068-2-32

Environmental: WEEE, RoHS

MTBF: 466,542 hours based on Mil-Hdbk-217F, GB

Warranty: 5 years

Management:

SNMP, Web, Telnet/SSH, CLI management
TFTP/HTTP backup/restore configurations
Firmware upgrade via TFTP/HTTP, supports dual firmware
RMON I (1, 2, 3, 9 group), RMON II
RFC1213 MIB II, Private MIB
Supports UPnP, IP Source Guard, Port Mirroring
Warning message sends to syslog, e-mail, alarm relay
DNS Client, Proxy
LLDP: LLDP-MED

System Log:

Supports local system log and remote Syslog server

DHCP:

Server, Client, Relay, Snooping
Snooping option 82, Relay option 82

Time Management:

IEEE1588 PTP V2: Ordinary-Boundary, Peer to Peer Transparent Clock, End to End
Transparent Clock, Master, Slave
NTP/SNTP Client

IPv6:

IPv6 Management Telnet Server/ICMP v6
SNMP over IPv6, HTTP over IPv6, SSH over IPv6, IPv6 Telnet, IPv6 NTP (Client), IPv6 SNTP (Client), IPv6 TFTP, IPv6 QoS, IPv6 ACL (256 entries)

Green Ethernet:

Supports IEEE802.3az EEE (Energy Efficient Ethernet): Management to optimize the power consumption
Determine the cable length and lowering the power for ports work with short cable
Lower the power for a port when there is no link
LED Power Management: Adjustment on LEDs intensity


Cable Diagnostic: (Copper ports only)

Shows physical status of the UTP cable, in order to get more accurate result the cable length suggestion is 7-140 meters

Advanced PoE Management:

PoE PD Failure Auto Checking and Auto reset while PD fails
PoE Scheduling (On/Off schedule weekly)
PoE Configuration, PoE Enable/Disable
Power limit by classification, Power limit by management
Max. PoE power budgets at 180W limitation
Power feeding priority

Dimensions (unit=mm)

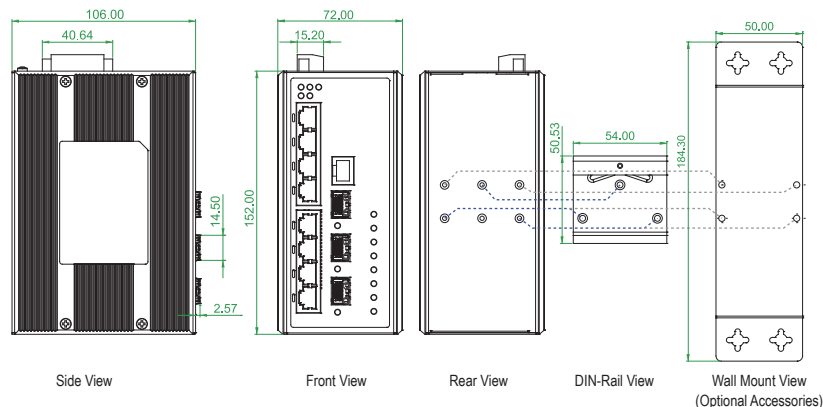

Ordering Information

CMG-838PTAT	Industrial 8 x 10/100Base-T(X) + 3 x 100/1000Base SFP Gigabit Managed PoE/PoE+ Ethernet Switch, -10 to 60°C, (NEMA TS-2, IEEE 1588 PTP, 180W)
CMG-838EPTAT	Industrial 8 x 10/100Base-T(X) + 3 x 100/1000Base SFP Gigabit Managed PoE/PoE+ Ethernet Switch, -40 to 75°C, (NEMA TS-2, IEEE 1588 PTP, 180W)